

## DS-2CE17H0T-IT3F(C) 5 MP Camera




- High quality imaging with 5 MP, 2560 × 1944 resolution
- 2.8 mm, 3.6 mm, 6 mm, 8mm, 12mm fixed focal lens
- Up to 40 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)




## ▪ Specification

| Camera                   |                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor             | 5 MP CMOS                                                                                                                                                                                                                                                                                                                                          |
| Signal System            | PAL/NTSC                                                                                                                                                                                                                                                                                                                                           |
| Frame Rate               | TVI: 5M@20fps, 4M@30fps, 4M@25fps, 1080p@30fps, 1080p@25fps<br>AHD: 5M@20fps, 4M@30fps, 4M@25fps<br>CVI: 4M@30fps, 4M@25fps<br>CVBS: PAL/NTSC                                                                                                                                                                                                      |
| Resolution               | 2560 (H) × 1944 (V)                                                                                                                                                                                                                                                                                                                                |
| Min. illumination        | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR                                                                                                                                                                                                                                                                                                           |
| Shutter Time             | PAL: 1/25 s to 1/50,000 s<br>NTSC: 1/30 s to 1/50,000 s                                                                                                                                                                                                                                                                                            |
| Lens                     | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens                                                                                                                                                                                                                                                                                                       |
| Horizontal Field of View | 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV: 110°<br>3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV: 105°<br>6 mm, horizontal FOV: 57°, vertical FOV: 43°, diagonal FOV: 72°<br>8 mm, horizontal FOV: 41°, vertical FOV: 31°, diagonal FOV: 52°<br>12 mm, horizontal FOV: 26°, vertical FOV: 19°, diagonal FOV: 32° |
| Lens Mount               | M12                                                                                                                                                                                                                                                                                                                                                |
| Day & Night              | ICR                                                                                                                                                                                                                                                                                                                                                |
| WDR (Wide Dynamic Range) | Digital WDR                                                                                                                                                                                                                                                                                                                                        |
| Angle Adjustment         | Pan: 0 to 360°, Tilt: 0 to 180°, Rotation 0 to 360°                                                                                                                                                                                                                                                                                                |
| Menu                     |                                                                                                                                                                                                                                                                                                                                                    |
| Image Mode               | STD/HIGH-SAT                                                                                                                                                                                                                                                                                                                                       |
| AGC                      | Support                                                                                                                                                                                                                                                                                                                                            |
| Day/Night Mode           | Auto/Color/BW (Black and White)                                                                                                                                                                                                                                                                                                                    |
| White Balance            | Auto/Manual                                                                                                                                                                                                                                                                                                                                        |
| AE (Auto Exposure) Mode  | DWDR/BLC/HLC/Global                                                                                                                                                                                                                                                                                                                                |
| Language                 | English                                                                                                                                                                                                                                                                                                                                            |
| Functions                | Brightness, Sharpness, Mirror, Smart IR                                                                                                                                                                                                                                                                                                            |
| 2D DNR                   | Yes                                                                                                                                                                                                                                                                                                                                                |
| Interface                |                                                                                                                                                                                                                                                                                                                                                    |
| Video Output             | TVI/AHD/CVI/CVBS                                                                                                                                                                                                                                                                                                                                   |
| General                  |                                                                                                                                                                                                                                                                                                                                                    |
| Operating Condition      | -40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)                                                                                                                                                                                                                                                                       |
| Power Supply             | 12 VDC ± 25%                                                                                                                                                                                                                                                                                                                                       |
| Power Consumption        | Max. 4.3 W                                                                                                                                                                                                                                                                                                                                         |
| Protection Level         | IP67                                                                                                                                                                                                                                                                                                                                               |
| Material                 | Front Cover: Metal<br>Main Body: Plastic                                                                                                                                                                                                                                                                                                           |
| IR Range                 | Up to 40 m                                                                                                                                                                                                                                                                                                                                         |
| Communication            | HIKVISION-C                                                                                                                                                                                                                                                                                                                                        |
| Dimensions               | 78.9 mm × 75.4 mm × 216.6 mm (3.10" × 2.97" × 8.53")                                                                                                                                                                                                                                                                                               |
| Weight                   | Approx. 330 g (0.73 lb.)                                                                                                                                                                                                                                                                                                                           |

## ▪ Dimension

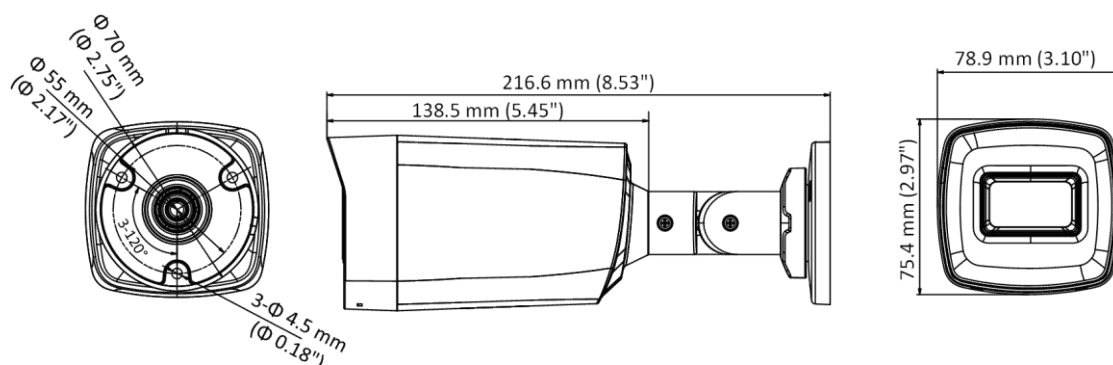

## ▪ Accessory



DS-1280ZJ-XS

## ▪ Available Model

DS-2CE17HOT-IT3F(C)

Distributed by



# HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahirvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +84-974270888  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-[0]31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com