




Reduce Power
Use By Over 70%



Powered By USB



ES-3308P V2

8-Port Fast Ethernet Desktop Switch

Description

The ES-3308P V2 is a 10/100 Mbps unmanaged Ethernet desktop switch designed to enhance network performance. Its compact, sleek design offers outstanding performance and high efficiency, using store and forward packet-switching technology to provide reliable data transfers, ideal for network connectivity in the SOHO environment.

To extend home networks or meet online gaming, multimedia transfer or streaming requirements the ES-3308P V2 is a cost-effective Fast Ethernet solution. The plug-and-play design ensures users can easily connect network devices such as PCs, network-attached storage or print servers to a home network with no manual configuration necessary.


Supports Auto-Negotiation

Each of the ES-3308P V2's ports automatically detect whether connected network devices are running at 10Mbps or 100Mbps and half-duplex or full-duplex mode, and adjusts the speed and mode accordingly ensuring easy and hassle-free operation.



Supports Non-Blocking Wire Speed

The ES-3308P V2 forwards and receives traffic seamlessly with its non-blocking wire-speed. Every port of the ES-3308P V2 supports speeds up to 200Mbps in full-duplex mode simultaneously, providing full wire speed to connected devices and allowing you to run a high speed network smoothly.

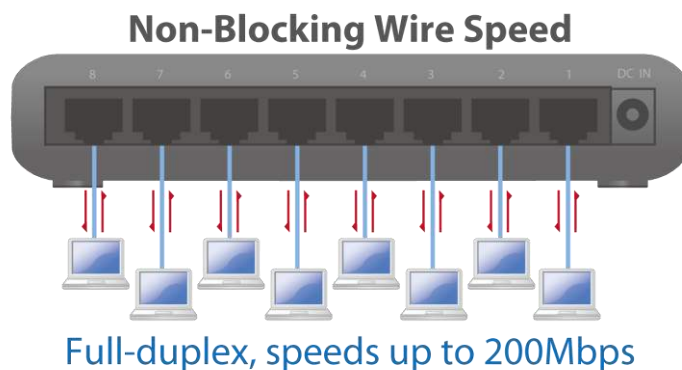

8-Port Fast Ethernet Desktop Switch

ES-3308P V2

IEEE Energy Efficient Ethernet (EEE) Compliance


Along with the Fast Ethernet speeds critical for next-generation network applications, the ES-3308P V2 offers environmental efficiency. To comply with the IEEE802.3az standard, the ES-3308P V2 provides power saving functionality to reduce energy consumption and save costs:

•Inactive Link Detection


When a network device is shut down and/or an inactive link is detected, the power usage adjustment feature automatically reduces power usage. The switch's power consumption will be dynamically adjusted according to the link status and the number of active network devices.

•Cable Length Detection


Devices equipped with this feature automatically detect the length of connected Ethernet cables and adjust power usage accordingly. The shorter the cable length, the less power it consumes.

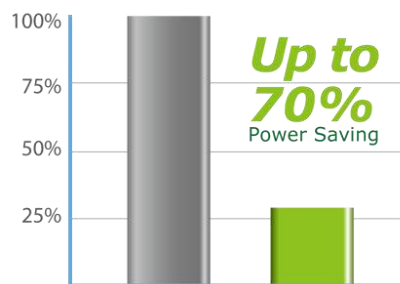

Less power consumption for inactive devices

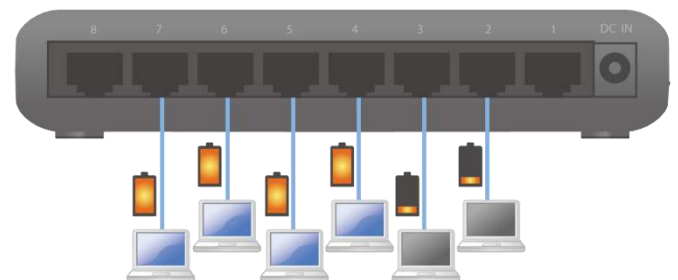

Less power consumption for shorter cables

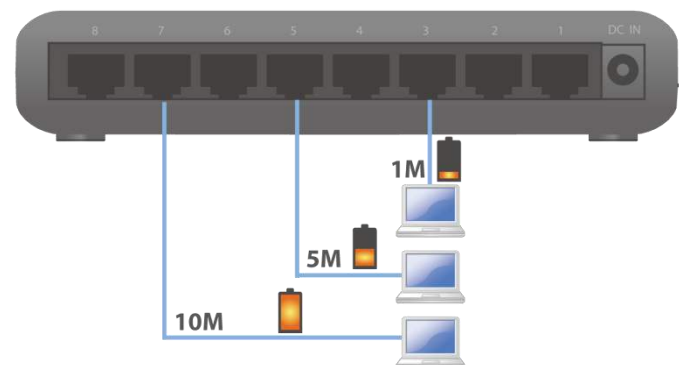


Easy to Use

The ES-3305P V2 is plug-and-play and supports a wide range of network protocols. Installation and network management is quick and straightforward, and clear and convenient LED indicators display easy to read port and switch status.



Optional Power Supply

The ES-3305P V2 can be powered either through a PC's or any other devices' USB port to eliminate the need for an additional power outlet, or through the AC power supply. (*USB power cable included.)

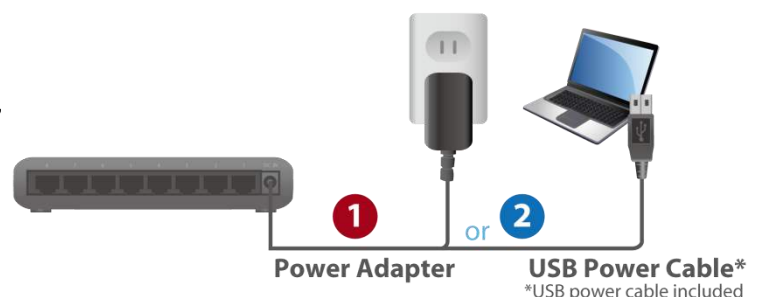

8-Port Fast Ethernet Desktop Switch

ES-3308P V2

FEATURES

- Complies with IEEE802.3, IEEE802.3u standards
- Supports auto MDI/MDI-X crossover detecting and auto correction
- Wire-speed packet filtering and forwarding rate
- Store-and-forward architecture filters fragment & CRC error packets
- Supports IEEE802.3az energy efficient Ethernet function

TECHNICAL SPECIFICATIONS

Standards	Features	Filtering / Forwarding Rates
<ul style="list-style-type: none"> • IEEE 802.3 10BASE-T • IEEE 802.3u 100BASE-TX • IEEE 802.3x Flow Control • IEEE 802.3az Energy Efficient Ethernet 	<ul style="list-style-type: none"> • RJ-45 Port: 8 • MAC Address: 1K • Buffer Memory: 56K • Transmission Method: Store and Forward 	<ul style="list-style-type: none"> • 100Mbps Port – 148,800pps • 10Mbps Port – 14,880pps
Transmission Media	LED Indicators	Power Requirement
<ul style="list-style-type: none"> • 10BASE-T Cat. 3, 4, 5 UTP/STP • 100BASE-TX Cat. 5 UTP/STP 	<ul style="list-style-type: none"> • Per Port: Link/Act • Per Unit: Power 	<ul style="list-style-type: none"> • DC 5V 0.6A
Temperature	Humidity	Power Consumption
<ul style="list-style-type: none"> • Operating: 0 to 40°C • Storage: -20 to 70°C 	<ul style="list-style-type: none"> • Operating: 10 to 90% RH (Non-condensing) • Storage: 5 to 90% RH (Non-condensing) 	<ul style="list-style-type: none"> • 1.405 Watts (Max)
Dimensions	Weight	Certifications
<ul style="list-style-type: none"> • 137 × 76 × 25.5 mm (L x W x H) 	<ul style="list-style-type: none"> • 126 g 	<ul style="list-style-type: none"> • CE • FCC Class B

APPLICATION DIAGRAM

- Connect the ES-3308P V2 to your router or cable/xDSL modem
- Connect a print server, NAS, smart TV, laptop, media player, game console and/or IP Camera to the ES-3308P V2.

