

## **DS-3E1505P-EI/M** **4 Port Gigabit Smart PoE Switch**



Smart managed switches are developed by Hikvision, featuring easy management and maintenance. You can easily deploy, monitor and expand your surveillance system anytime and anywhere with our software platforms. You can view the network topology, monitor the health of the network and receive device alarms in real time, which greatly reduces the cost of network operation and maintenance.

- 4 × Gigabit PoE port, 1 × Gigabit RJ45 port
- Total PoE Power Budget 45 W
- Support 802.1Q VLAN
- Support PoE watchdog to detect and restart the cameras that do not respond
- Support STP/RSTP loop prevention
- Support cable detection to locate failure
- Up to 300 m Long Range PoE Transmission
- 6 kV Surge Protection

## ▪ Specification


| Model              |                        | DS-3E1505P-EI/M                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network Parameters | Ports                  | 4 × Gigabit PoE port, 1 × Gigabit RJ45 port                                                                                                                                                                                                                                                                                                                                                   |
|                    | MAC Address Table      | 2 K                                                                                                                                                                                                                                                                                                                                                                                           |
|                    | Switching Capacity     | 10 Gbps                                                                                                                                                                                                                                                                                                                                                                                       |
|                    | Packet Forwarding Rate | 7.44 Mpps                                                                                                                                                                                                                                                                                                                                                                                     |
|                    | Internal Cache         | 1 Mbits                                                                                                                                                                                                                                                                                                                                                                                       |
| PoE Power Supply   | PoE Standard           | IEEE 802.3af, IEEE 802.3at                                                                                                                                                                                                                                                                                                                                                                    |
|                    | PoE Power Pin          | End-span: 1/2(-), 3/6(+)                                                                                                                                                                                                                                                                                                                                                                      |
|                    | PoE Port               | PoE: Ports 1 to 4                                                                                                                                                                                                                                                                                                                                                                             |
|                    | Max. Port Power        | 30 W                                                                                                                                                                                                                                                                                                                                                                                          |
|                    | PoE Power Budget       | 45 W                                                                                                                                                                                                                                                                                                                                                                                          |
| Software Function  | Long Range             | Ports 1 to 4: up to 300 m.<br>Long range performance may vary depend on camera model or cable condition.                                                                                                                                                                                                                                                                                      |
|                    | Port Isolation         | Ports 1 to 4: port isolation mode to improve network security<br>Ports in an isolation group cannot communicate with each other, but they can communicate with ports outside the isolation group.                                                                                                                                                                                             |
|                    | PoE Watchdog           | Ports 1 to 4: auto detect and restart the cameras that do not respond.                                                                                                                                                                                                                                                                                                                        |
|                    | Link Aggregation       | Link aggregation is used to aggregate multiple physical ports to form a logical port for load balancing, bandwidth expansion, and port protection.<br>Support static link aggregation.<br>Support 1 aggregation group.                                                                                                                                                                        |
|                    | Loop Prevention        | Loop prevention is used to prevent the switching network from forming loops, which will seriously affect network communication. Disabled by default.<br>Support 802.1D STP.<br>Support 802.1w RSTP.                                                                                                                                                                                           |
|                    | VLAN                   | VLAN is used for network scale planning and network health improvement.<br>Support 802.1Q.<br>Configurable VLAN ID from 1-4094.<br>Support Trunk, Access port mode.<br>Support Max. 32 VLAN.                                                                                                                                                                                                  |
|                    | HPP                    | Support one-click activation and remote management via Hik-Partner Pro.<br>Functions supported:<br>1. Display the port rate.<br>2. Display the port bandwidth utilization rate.<br>3. Display the PoE power usage.<br>4. Display topology information.<br>5. Display the alarm status.<br>6. Restart ports and devices.<br>7. Enable port long-range mode.<br>8. Remotely upgrade the device. |
|                    | System Maintenance     | Support device management via web.<br>Support DHCP Client. Enabled by default for dynamic assignment of management IP addresses.<br>Support Super IP, which is a fixed IP address (10.180.190.200) for direct access.                                                                                                                                                                         |

|                 |                           |                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 |                           | Support management via Hik-Central Pro.<br>Support remote management via Hik-Partner Pro.<br>Support cable detection. Abnormal open circuits and short circuits as well as network cable length can be detected.<br>Supports 802.1ab LLDP for peer device discovery.<br>Support SNMP v1/v2c for third-party management platform access.<br>Support port mirroring for fault locating. |
| <b>General</b>  | Shell                     | Metal material                                                                                                                                                                                                                                                                                                                                                                        |
|                 | Net Weight                | 0.26 kg (0.573 lb)                                                                                                                                                                                                                                                                                                                                                                    |
|                 | Gross Weight              | 0.75 kg (1.65 lb)                                                                                                                                                                                                                                                                                                                                                                     |
|                 | Dimensions (W × H × D)    | 121.1 mm × 27.6 mm × 83.1 mm (4.77" × 1.09" × 3.27")                                                                                                                                                                                                                                                                                                                                  |
|                 | Operating Temperature     | 0 °C to 40 °C (32 °F to 104 °F)                                                                                                                                                                                                                                                                                                                                                       |
|                 | Storage Temperature       | -40 °C to 85 °C (-40 °F to 185 °F)                                                                                                                                                                                                                                                                                                                                                    |
|                 | Operating Humidity        | 5% to 95% (no condensation)                                                                                                                                                                                                                                                                                                                                                           |
|                 | Relative Humidity         | 5% to 95% (no condensation)                                                                                                                                                                                                                                                                                                                                                           |
|                 | Power Supply              | 54 V DC, 0.92 A                                                                                                                                                                                                                                                                                                                                                                       |
|                 | Installation Mode         | Desk-Mounted, Wall-Mounted                                                                                                                                                                                                                                                                                                                                                            |
|                 | Max. Power Consumption    | 50 W                                                                                                                                                                                                                                                                                                                                                                                  |
|                 | Power Consumption in Idle | 1 W                                                                                                                                                                                                                                                                                                                                                                                   |
|                 | Surge Protection          | 6 kV                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Approval</b> | EMC                       | CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020)                                                                                                                                                                                                                                           |
|                 | Safety                    | CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)                                                                                                                                                                                                                                                                                     |
|                 | Chemistry                 | CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006)                                                                                                                                                                                                                                                                                                         |

## ▪ Available Model


DS-3E1505P-EI/M

## ▪ Typical Application

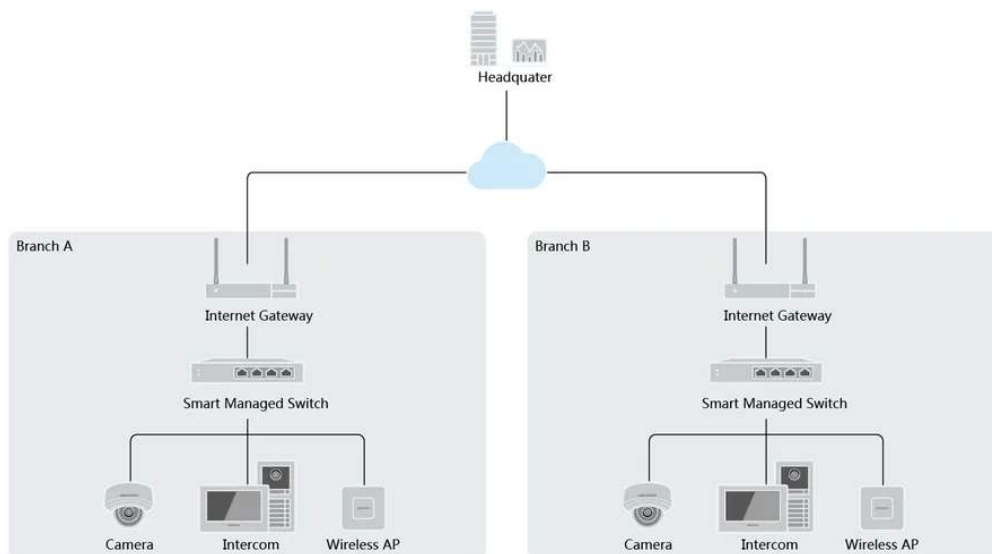


## ▪ Physical Interface

Front Panel

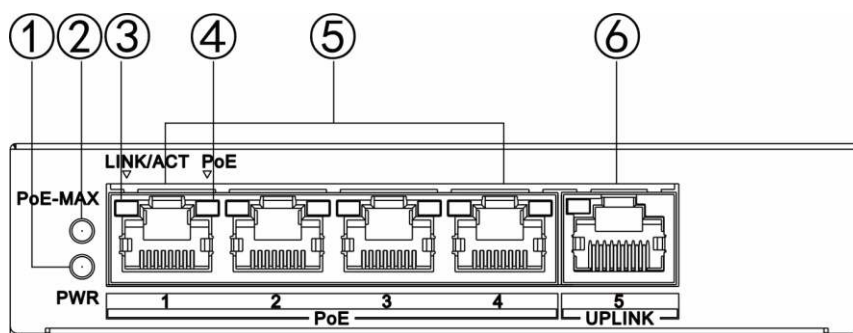

Rear Panel

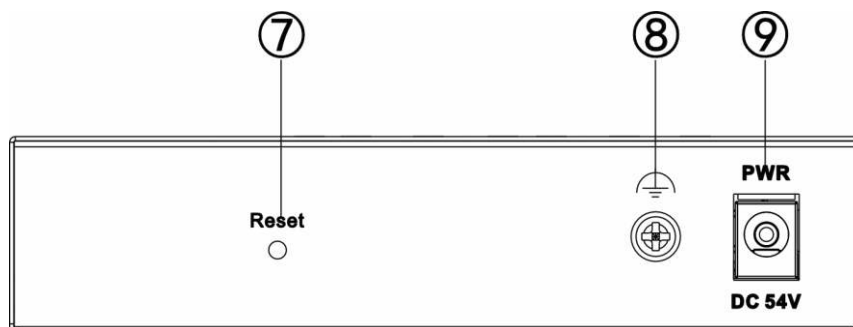


| No. | Indicator/Port     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ①   | PWR Indicator      | <ul style="list-style-type: none"> <li>● Solid on: The switch is powered on normally.</li> <li>● Unlit: No power supply is connected or power supply is abnormal.</li> </ul>                                                                                                                                                                                                                                                                                                                                |
| ②   | PoE-MAX Indicator  | <ul style="list-style-type: none"> <li>● Solid on/Flashing: The output power of the switch is about to reach or has reached the upper limit. The power supply may be abnormal if more devices are connected.</li> <li>● Unlit: The switch does not supply power to a powered device (PD), or supplies power to a PD normally and its output power does not reach the upper limit. (About 5 seconds after the output power of the switch returns to normal, the PoE-MAX indicator will be unlit.)</li> </ul> |
| ③   | LINK/ACT Indicator | <ul style="list-style-type: none"> <li>● Solid on: The port is connected.</li> <li>● Flashing: The port is transmitting data.</li> <li>● Unlit: The port is disconnected or connection is abnormal.</li> </ul>                                                                                                                                                                                                                                                                                              |
| ④   | PoE Indicator      | <ul style="list-style-type: none"> <li>● Solid on: The switch supplies power to a PD normally.</li> <li>● Unlit: The switch is disconnected from a PD or power supply is abnormal.</li> </ul>                                                                                                                                                                                                                                                                                                               |

---

|   |                       |                                                                                  |
|---|-----------------------|----------------------------------------------------------------------------------|
| ⑤ | Gigabit PoE RJ45 Port | Used for connection to a PD via a network cable.                                 |
| ⑥ | Gigabit RJ45 Port     | Used for connection to another device via a network cable.                       |
| ⑦ | Reset Button          | Used for restoring all the configurations of the switch to the default settings. |
| ⑧ | Grounding Terminal    | Used for connection to the grounding cable to protect the switch from lightning. |
| ⑨ | Power Supply          | Use the attached power cord and power adapter to connect the switch to a socket. |

## Dimension

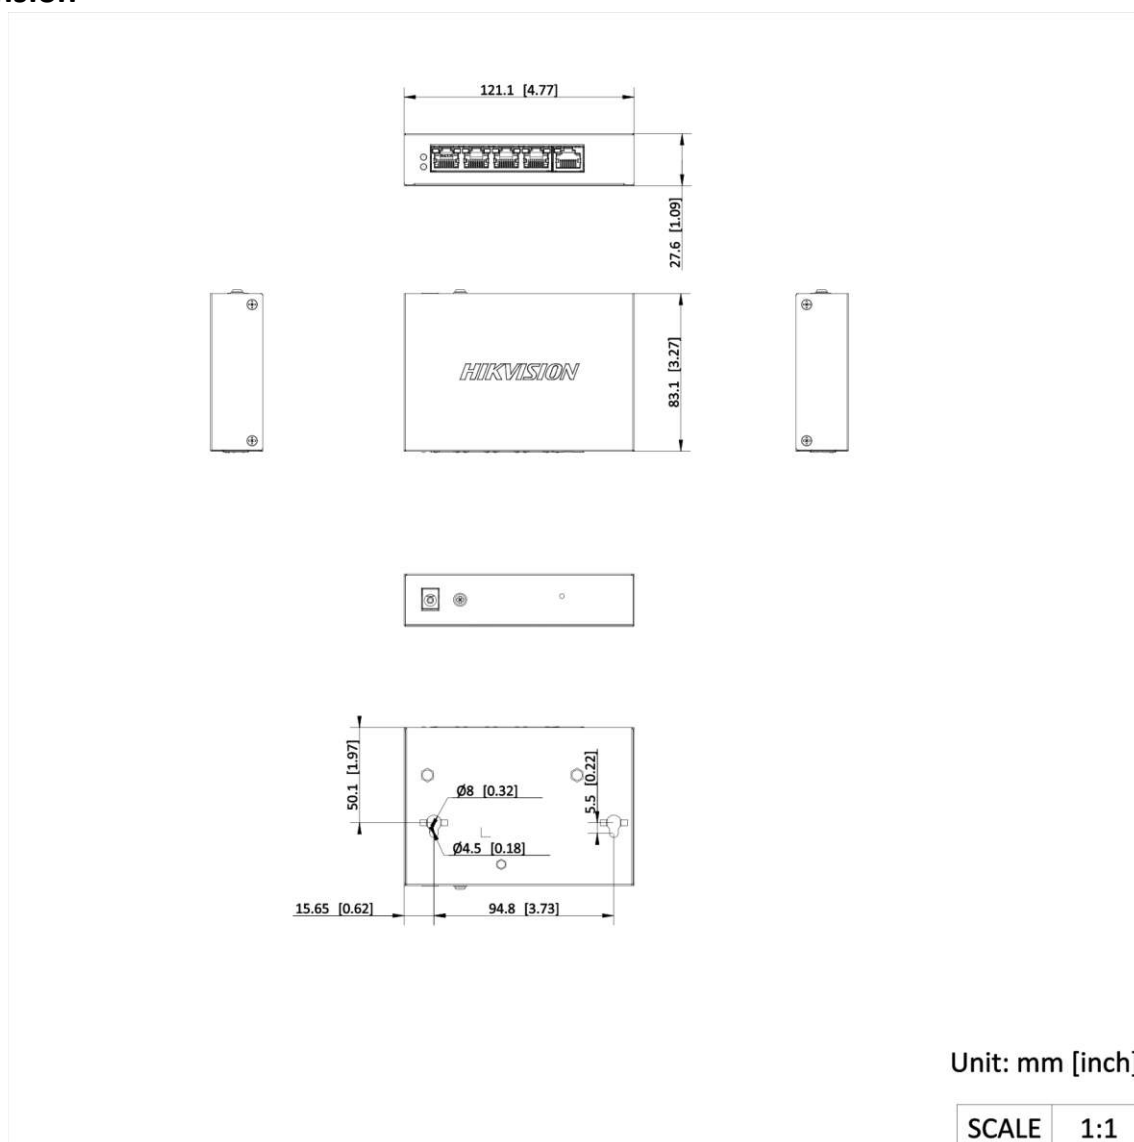

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

