

DS-UPS3000-x UPS



- Built-in AVR
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection
- USB port for remote control
- LCD display


▪ Specification


Power	
UPS Capacity	3000 VA / 1800 W
Input	
Input Voltage Range	85 VAC to 150 VAC
Input Frequency	50/60 Hz self-adaptive
Plug Type	Type B (NEMA 5-15)
Output	
Output Voltage Range	110 VAC to 125 VAC
Output Frequency	50/60 Hz $\pm$ 0.5 Hz self-adaptive
Transfer Time	$\leq$ 10 ms
Waveform	PWM
Outlet Type	Type B (NEMA 5-15)
Outlet Number	6
Battery	
Battery Type	12 V/9 Ah *4 pcs, lead-acid battery
Recharge Time	6-8 hours recover to 90% capacity
Typical Backup Time	Run time at 100w: 150 min Run time at 600w: 15 min Run time at 900w: 6 min
Interface	
Communicate Ports	USB
Protection	
Full Protection	Surge protection, Overload protection, Discharge protection, Short circuit protection
Indicator	
Display	LCD Screen Input Voltage, Output Voltage, Battery capacity, load level
Alarm	Charging Mode (DC mode): Sounding every 8 seconds Low Battery: Sounding every second Overloading Mode: Sounding every 0.5 seconds Fault: Continuously sounding
General	
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Operating Humidity	30% to 90% (non-condensing)
Dimension	412 mm $\times$ 145 mm $\times$ 210 mm (16.22" $\times$ 5.71" $\times$ 8.27")
Weight	Approx. 18.5 kg (40.8 lb)

▪ Available Model

DS-UPS3000-x

▪ Dimension

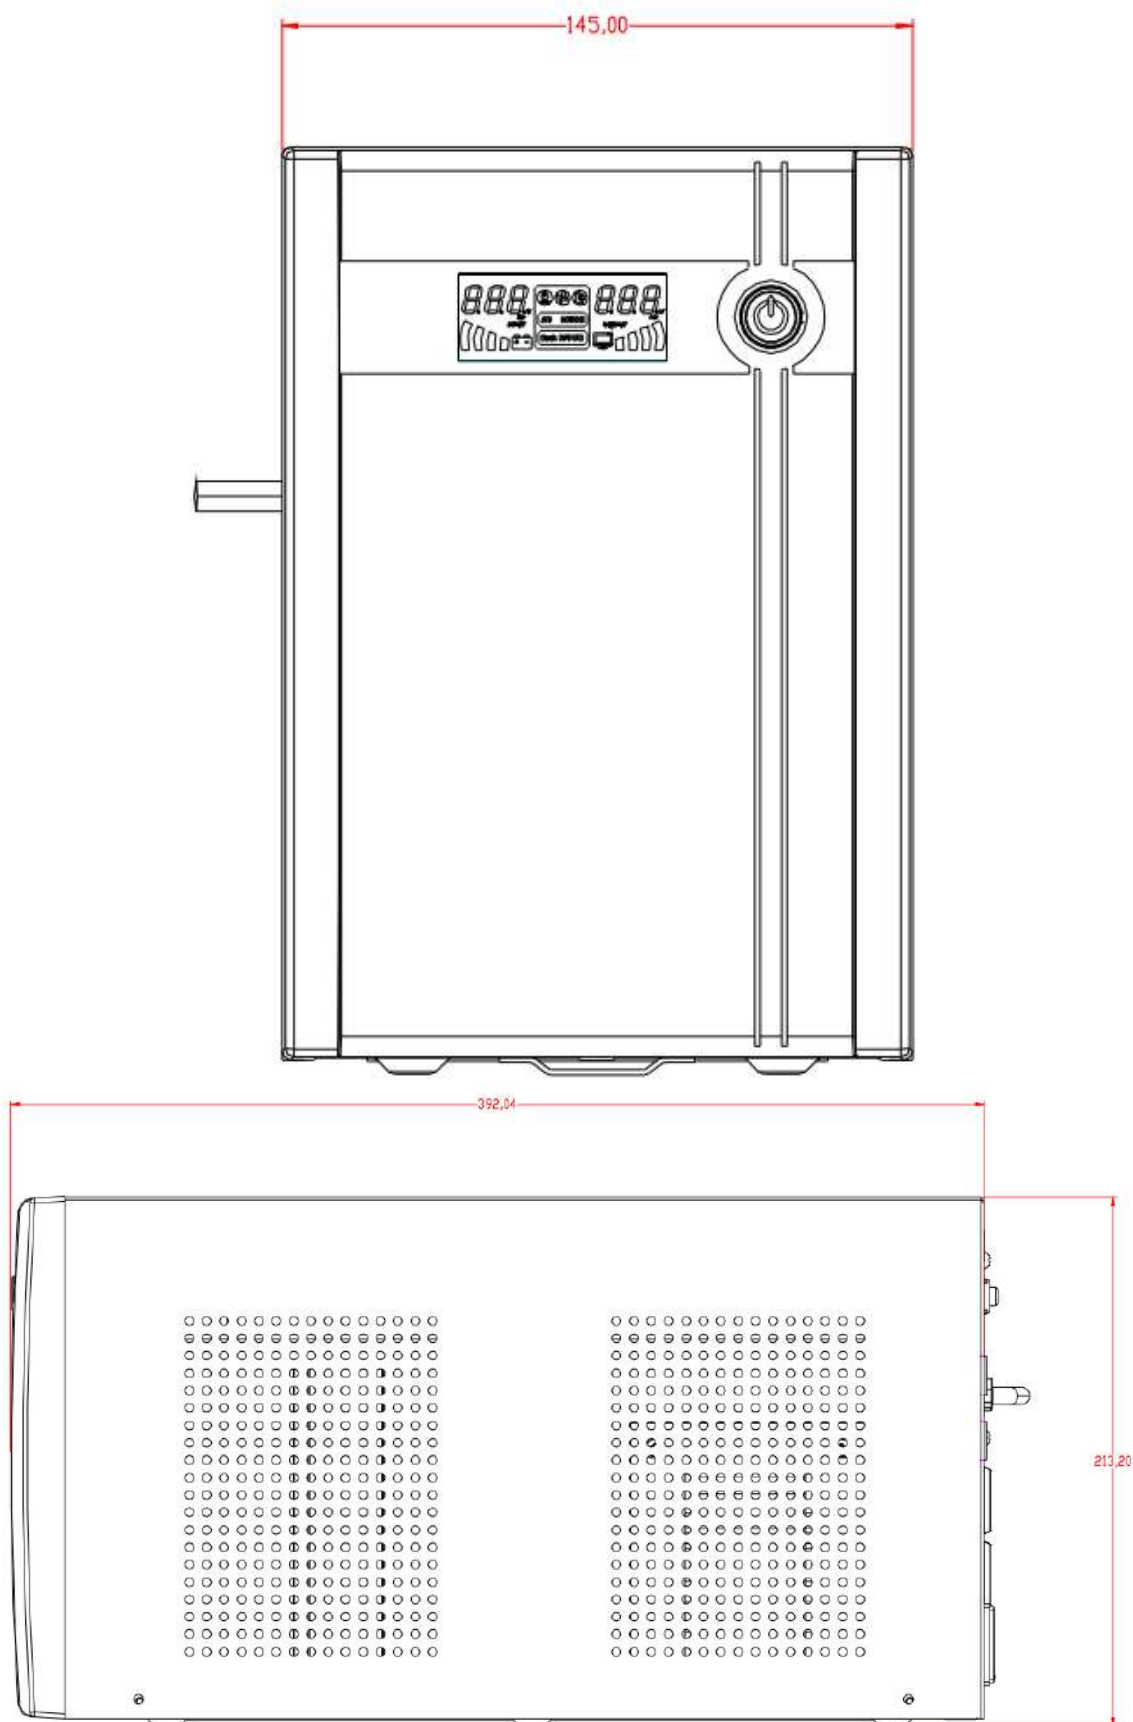

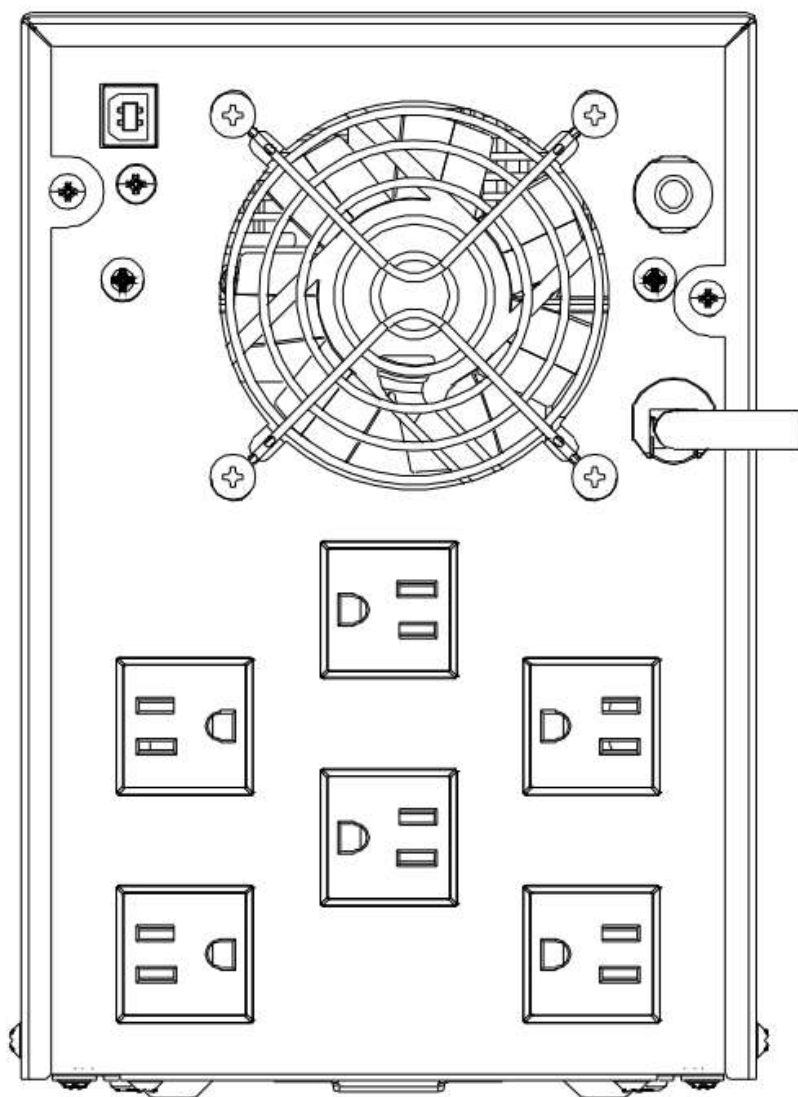

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq