

## DS-7616NXI-I2/S 16-ch 1U AcuSense 4K NVR



- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream
- Up to 8-ch facial recognition for face picture
- Up to 16-ch IP camera inputs
- Up to 32-ch 1080p decoding capability
- Up to 8-ch IP speakers can be connected

## ▪ Function

### Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%

- Full channel IP cameras connection

- Compatible to third-party network cameras

### HD Video Output

- Provide independent HDMI and VGA outputs

- HDMI video output at up to 4K resolution

### Storage and Playback

- Up to 2 SATA interfaces for HDD connection

- 16-ch synchronous playback

### Smart & POS Function

- Support multiple VCA (Video Content Analytics) events

- Smart search for the selected area in the video, and smart playback to improve the playback efficiency

- POS information overlay on live view and playback

- POS triggered recording and alarm

### Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management

## ▪ Specification

Intelligent Analytics	
AI by NVR	<p>DS-7616NXI-I2/S: Facial recognition, perimeter protection, motion detection 2.0</p> <p>DS-7616NXI-I2/S(标配)(C), DS-7616NXI-I2/S(中性)(C), DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL, DS-7616NXI-I2/S(中性), DS-7616NXI-I2/S(标配):</p> <p>DS-7616NXI-I2/S(标配)(E), DS-7616NXI-I2/S(中性)(E): Facial recognition, perimeter protection, motion detection 2.0</p>
AI by Camera	<p>DS-7616NXI-I2/S: Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA</p> <p>DS-7616NXI-I2/S(标配)(C), DS-7616NXI-I2/S(中性)(C), DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL, DS-7616NXI-I2/S(中性), DS-7616NXI-I2/S(标配):</p> <p>DS-7616NXI-I2/S(标配)(E), DS-7616NXI-I2/S(中性)(E): Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA</p>
Engine	<p>DS-7616NXI-I2/S: 1, engine mode is adjustable</p> <p>DS-7616NXI-I2/S(标配)(C), DS-7616NXI-I2/S(中性)(C), DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL, DS-7616NXI-I2/S(中性), DS-7616NXI-I2/S(标配):</p> <p>DS-7616NXI-I2/S(标配)(E), DS-7616NXI-I2/S(中性)(E): 1, engine mode is adjustable</p>
Facial Recognition	
Face Picture Library	<p>DS-7616NXI-I2/S: Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB)</p> <p>DS-7616NXI-I2/S(标配)(E), DS-7616NXI-I2/S(中性)(E): Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB)</p> <p>DS-7616NXI-I2/S(标配)(C), DS-7616NXI-I2/S(中性)(C), DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL, DS-7616NXI-I2/S(中性), DS-7616NXI-I2/S(标配): Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 150 MB)</p>
Face Picture Comparison	<p>DS-7616NXI-I2/S: 8-ch</p> <p>DS-7616NXI-I2/S(标配)(E), DS-7616NXI-I2/S(中性)(E): 8-ch</p> <p>DS-7616NXI-I2/S(标配)(C), DS-7616NXI-I2/S(中性)(C), DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL, DS-7616NXI-I2/S(中性), DS-7616NXI-I2/S(标配): 4-ch face picture comparison alarm</p>
Facial Detection and Analytics	<p>DS-7616NXI-I2/S: Face picture comparison, human face capture, face picture search</p> <p>Face picture comparison, human face capture, face picture search</p>

<p>Facial Detection and Analytics Performance</p>	<p>DS-7616NXI-I2/S:4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)  DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):1-ch human face capture (HD network camera, up to 8 MP , H.264/H.265)  DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)</p>
<p><b>Motion Detection 2.0</b></p>	
<p>Human/Vehicle Analysis</p>	<p>DS-7616NXI-I2/S:N/A  DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):  DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):16-ch</p>
<p>By NVR</p>	<p>DS-7616NXI-I2/S:All channels for Hikvision cameras  DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):  DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels for Hikvision cameras</p>
<p>By Camera</p>	<p>DS-7616NXI-I2/S:All channels  DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):  DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels</p>
<p><b>Perimeter Protection</b></p>	
<p>Human/Vehicle Analysis</p>	<p>DS-7616NXI-I2/S:N/A  DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):  DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm  DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C):Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm  Up to 12 rules in total</p>
<p>By NVR</p>	<p>DS-7616NXI-I2/S:4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm;  Up to 12 rules in total  DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):  DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm;  Up to 12 rules in total</p>

By Camera	<p>DS-7616NXI-I2/S:All channels  DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋  HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):  DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels</p>
<b>ANPR</b>	
By Camera	<p>DS-7616NXI-I2/S:All channels  Support Countries &amp; Regions:  1. Myanmar, Philippines, Indonesia, Vietnam, Pakistan, New Zealand, Australia, Sri Lanka, Singapore, Malaysia  2. Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, The United Kingdom, Ireland, Germany, Italy, Austria, Palestine, Latvia, Lithuania, Estonia, Belgium, Luxembourg, Ukraine, Uzbekistan, Kazakhstan, Mongolia, Moldova, Kyrgyzstan, Azerbaijan, Georgia, Armenia, Albania, Kosovo, Belarus, Cyprus, Denmark, Finland, Malta, Portugal, Romania, Slovenia, Sweden, Israel, Bosnia and Herzegovina, Turkmenistan, Montenegro, Serbia, Tajikistan, Iceland, Liechtenstein  3. Argentina, Brazil, Chile, Colombia, Peru, Ecuador, Paraguay, Uruguay, Salvador, Bolivia,  Canada, Algeria, Mexico, Panama, Costa Rica, Nigeria, Kenya, Mauritius, Tanzania, Cote d'Ivoire, South Africa, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Republic of Trinidad and Tobago, Dominica, Guatemala, Senegal, Algeria, Cameroon  4. Qatar, Kuwait, Oman, Jordan, Lebanon, Iraq, United Arab Emirates, Saudi Arabia, Bahrain, Egypt, Libya  DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋  HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):  DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels</p>
Vehicle Attributes	<p>DS-7616NXI-I2/S:Vehicle brand, vehicle color, vehicle type  DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋  HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):  DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Plate number, license plate color, license plate type</p>
Plate Attributes	<p>DS-7616NXI-I2/S:Plate number, license plate color, license plate type  DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋  HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):  DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Vehicle brand, vehicle color, vehicle type</p>

Video and Audio	
IP Video Input	DS-7616NXI-I2/S:16-ch DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):16 DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):16-ch
Incoming Bandwidth	160 Mbps
Outgoing Bandwidth	256 Mbps
HDMI Output	DS-7616NXI-I2/S:4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
VGA Output	DS-7616NXI-I2/S:1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):1920 × 1080/60 Hz
Video Output Mode	HDMI/VGA independent output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ)
Decoding	
Decoding Format	DS-7616NXI-I2/S: H.265+/H.265/H.264+/H.264 DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):H.265+/H.265/H.264+/H.264 DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标 配):H.265,H.265+,H.264,H.264+,MPEG4

Recording Resolution	<p>DS-7616NXI-I2/S:32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF</p> <p>*: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs.</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):12MP/8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF</p> <p>32MP/24MP/12MP/8MP/7MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF</p> <p>*: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs.</p>
Synchronous playback	16-ch
Live View Window Division	<p>DS-7616NXI-I2/S:1/4/6/8/9/16,1/2/4/6/8/9/16</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):1/2/4/6/8/9/16</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):1/4/6/8/9/16</p>
Aux Port Window Division	<p>DS-7616NXI-I2/S:1/4/6/8/9/16,1/2/4/6/8/9/16</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):1/2/4/6/8/9/16</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):1/4/6/8/9/16</p>
Decoding Capability	<p>DS-7616NXI-I2/S:Enable AI by NVR: 20-ch@1080p (30 fps)</p> <p>Disable AI by NVR: 32-ch@1080p (30 fps)</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):16-ch @ 1080p (30 fps)</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Enable AI by NVR: 20-ch@1080p (30 fps)</p> <p>Disable AI by NVR: 32-ch@1080p (30 fps)</p>
Dual-Stream Recording	Support
Audio Compression	<p>DS-7616NXI-I2/S:G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):G.711ulaw,G.711alaw,G.722,G.726,MP2L2</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM</p>
Stream Type	Video, Video & Audio
<b>Network</b>	
Network Interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface

Remote Connection	DS-7616NXI-I2/S:128 DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):128
Network Protocol	DS-7616NXI-I2/S:TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF(Version 2.2), OTAP DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
API	DS-7616NXI-I2/S:ONVIF (profile S/G); SDK; ISAPI DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):ONVIF (profile S/G); SDK; ISAPI
Compatible Browser	DS-7616NXI-I2/S:IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Camera Access Protocol	ONVIF(Version 2.5), RTSP
<b>Auxiliary Interface</b>	
SATA	2 SATA interfaces
Capacity	DS-7616NXI-I2/S:Up to 16 TB capacity for each disk DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):Up to 8 TB capacity for each disk DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Up to 14 TB capacity for each disk
Serial Interface	DS-7616NXI-I2/S:N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E): DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):RS-485 (half-duplex), RS-232, Keyboard
Alarm In/Out	4/1
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0


General	
GUI Language	<p>DS-7616NXI-I2/S:English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew</p>
Power Supply	<p>DS-7616NXI-I2/S:100 to 240 VAC, 50 to 60 Hz</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):100 to 240 VAC, 50 to 60 Hz</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):≤ 40 W</p>
Consumption	<p>DS-7616NXI-I2/S:≤ 30 W (without HDD)</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):≤ 15W</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E): ≤ 30 W (without HDD)</p>
Working Temperature	<p>DS-7616NXI-I2/S:-10 °C to 55 °C (14 °F to 131 °F)</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):-10°C ~ + 55°C</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):-10° C to 55° C (14° F to 131° F)</p>
Working Humidity	10% to 90%
Chassis	<p>DS-7616NXI-I2/S:1U chassis</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):1U</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E): 1U chassis</p>
Dimension (W × D × H)	<p>DS-7616NXI-I2/S:385 × 317 × 52 mm ( 15.2"× 12.5" × 2.0")</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):385 × 317 × 52 mm ( 15.2"× 12.5" × 2.0")</p> <p>DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):385 × 315 × 52 mm ( 11.6"× 9.5" × 1.6")</p>

Weight	DS-7616NXI-I2/S:≤ 2.5 kg (without HDD, 5.5 lb.) DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):≤ 2.5 kg (without HDD, 5.5 lb.) DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配):≤ 1.6 kg (3.5 lb)
<b>Certification</b>	
Obtained Certification	DS-7616NXI-I2/S:CE, CB, REACH, WEEE, UKCA, LOA DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):CE, CB, REACH, WEEE, UKCA, LOA
CE	DS-7616NXI-I2/S:EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4 DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(中性),DS-7616NXI-I2/S(标配): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4

## ▪ Typical Application

## ▪ Physical Interface


No.	Description	No.	Description
1	LAN1 and LAN2 network interfaces	6	USB 3.0 interface and VIDEO OUT
2	AUDIO IN//AUDIO OUT	7	Power supply
3	HDMI interface	8	GND
4	VGA interface	9	Power switch
5	ALARM IN/OUT		

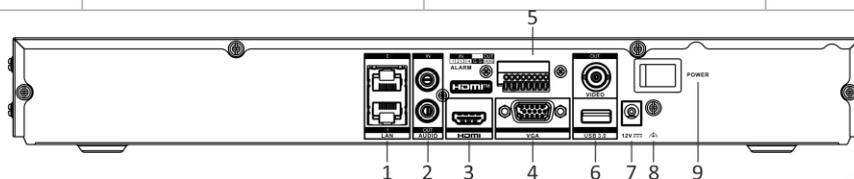

## ▪ Available Model

DS-7616NXI-I2/S(STD)(E)  
DS-7616NXI-I2/S(NEU)(E)  
DS-7616NXI-I2/S(STD)(E)/BRA/MAO  
DS-7616NXI-I2/S(STD)(C)  
DS-7616NXI-I2/S(NEU)(C)  
DS-7616NXI-I2/S(STD)(C)/UAE HTL  
DS-7616NXI-I2/S(NEU)  
DS-7616NXI-I2/S(STD)

## ▪ Dimension

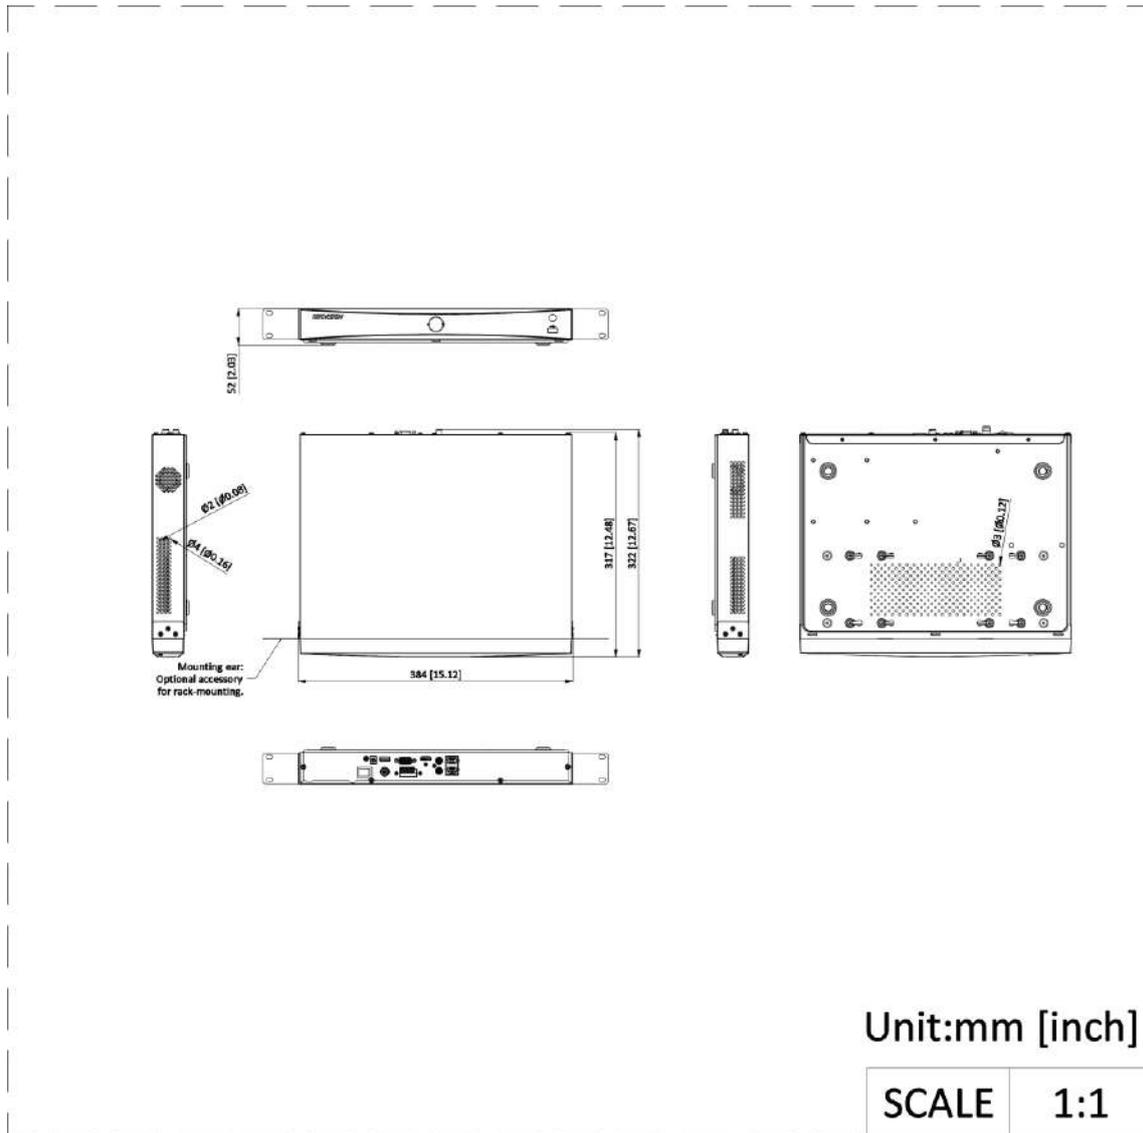

▪ Accessory

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

